


PAID DAYLIFE

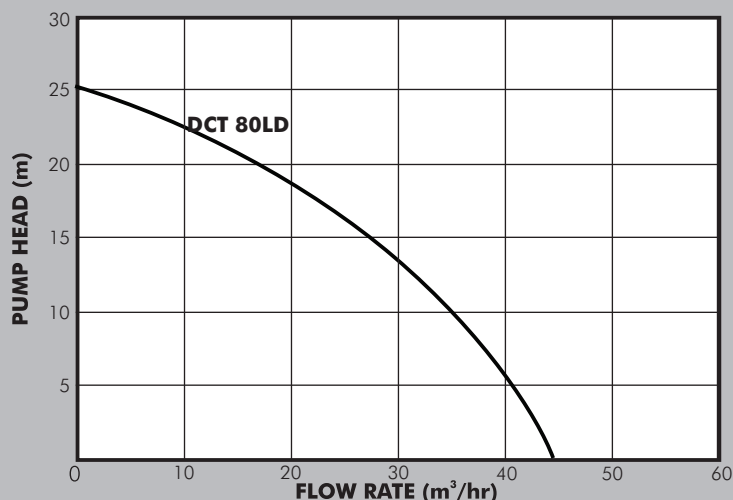

The DAYLIFF DCT range of portable diesel engine pumps are of self-priming centrifugal type specially designed for pumping waste water with high silt loads with applications in construction site drainage, sewage abstraction, flood drainage etc. Pumps are fitted with open vane type impellers for enhanced solid passing performance and are also provided with an easy opening front casing for volute cleaning incase of blockage. Both models are powered by reliable and economic diesel engines.

4 stroke OHV, direct injection air cooled diesel fitted with oil alert protection.

Note that performance curves for all engines relate to the engine governor set at maximum speed to achieve maximum rated power output. To prolong engine life pumps should only be run under maximum power conditions for short periods and for extended duty the throttle setting should be reduced to approximately three-quarters power. Pump performance will then be reduced accordingly.

SPECIFICATIONS

Model	Inlet & Outlet (")	Fuel	Starter	Max Particle Size (mm)	Engine			Fuel		Dimensions (mm)			Weight (kg)
					Type	Capacity (cc)	Max. Power (HP)	Tank (ltr)	Consumption (l/hr)	L	W	H	
DCT 80LD	3	Diesel	Recoil	0.2	LT170F	247	5.5	2.5	0.9	580	440	448	36

