




DDJ
Domestic Pumps

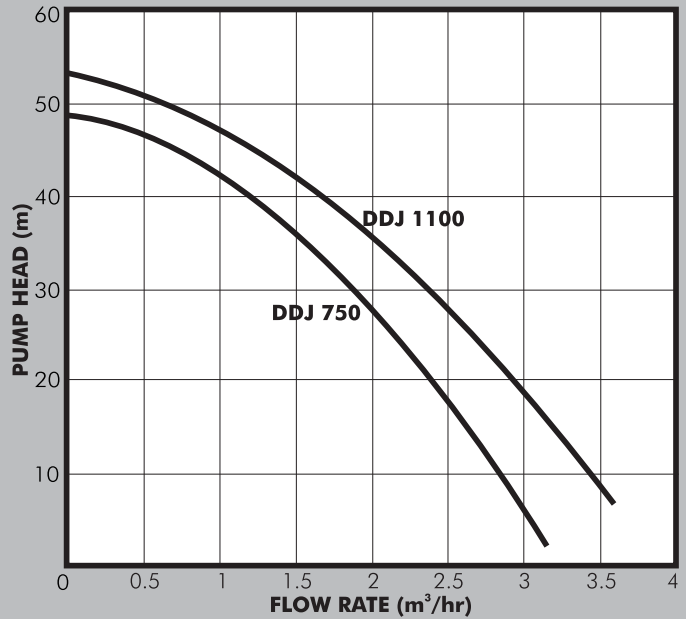

PUMP

The Dayliff DDJ Centrifugal jet type pumps is specifically designed for all small scale domestic and commercial water supply uses. It features an integral ejector unit to provide highly effective self priming performance. The pump body is made from cast iron, the ejector and impeller from engineering plastic.

MOTOR

Pumps are close coupled to reliable TEFC electric motors designed for continuous operation and are provided with a thermal cutout to protect against electrical overload. They can be connected directly to the mains power supply through a 10A fuse or MCB.

Enclosure Class: IP44

Insulation Class: F

Voltage: 1x240V

Speed: 2900rpm

OPERATING CONDITIONS

Pumped Liquid: Thin, clean, chemically non-aggressive liquids without solid particles or fibres

Max. Fluid Temperature: +50°C

Max. Ambient Temperature: +40°C

Max. Suction Lift: 9m at sea level

PUMP DATA

Model	Motor (kW)	Current (A)	Dimensions (mm)					Weight (kg)
			Inlet (")	Outlet (")	L	W	H	
DDJ 750	0.75	5.2	1	1	435	191	200	17
DDJ 1100	1.1	7	1.25	1	515	209	218	32

