



DLIP

Lithium Iron Phosphate Battery



DLIP 12/24VDC (Free Standing)



DLIP 48VDC (Rack Mount)




DLIP 48V (Wall Mount)




DLIP 48VDC 300AH (Ground Mount)

Discharge Performance @25°C

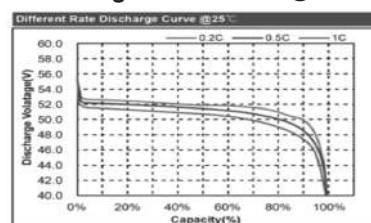

Different DoD Discharge Cycle Life Curve @1C

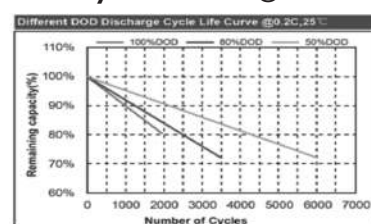

Dayliff DLIP Lithium Iron Phosphate (LiFePO₄) batteries with Battery Management System control are high-performance products matched to the Dayliff DUV Ultraverter multifunction inverters with principal applications for solar power system storage and mains power supply backup. They offer many benefits including enhanced power output, considerably extended life and cooler operation in high temperatures and are especially suited to high specification installations. Particular benefits include:-

- 100% depth of discharge with a design life of up to 8000 cycles, 4 times the life of a comparable Lead Acid type for 48VDC batteries and 6000 cycles at 80% depth of discharge for 12/24VDC batteries.
- Constant discharge voltage that enables the battery to deliver nearly full power until it is fully discharged. This also greatly simplifies voltage regulation control.
- Lighter weight but higher energy density to similar capacity Lead Acid alternatives.
- Low self-discharge rate of 3% per month.
- Built in battery charge/discharge protection.
- Excellent resistance to over and under charge with no damaging effects.
- Maintenance free, totally safe and environmentally friendly.
- 48VDC DLIP batteries are equipped with BMS software protection and batteries should only be connected in parallel. Series connection will result in battery damage.
- 12/24VDC lithium batteries have inbuilt BMS hardware protection, series connection can be done up to 48VDC.

In every aspect of performance Lithium Iron Phosphate batteries offer a much superior solution and deliver the more economical long term outcome due to their greatly increased life, consistent power output and better charge/discharge performance. For high specification systems where enhanced performance is demanded and reliability is essential they are the preferred choice.

TECHNICAL DATA

Model	Specification	Storage Capacity (kWhrs)	Installation Configuration	Max. Charge Current (A)	Max. Discharge Current (A)	Dimensions(mm)			Weight (Kgs)
						Length	Width	Height	
DLIP-05012	12VDC 50AH	0.6	Free Standing	25	50	260	167	210	7.5
DLIP-10012	12VDC 100AH	1.3		50	100	339	185	218	12
DLIP-10024	24VDC 100AH	2.6				522	240		23
DLIP-20024	24VDC 200AH	5.1		100		580	400	142	45
DLIP-10048	48VDC100AH		Wall Mount						
DLIP-10048			Rack Mount	482			480	133	44
DLIP-20048	48VDC 200AH	10.2			Ground Mount	300	300	733	500
DLIP-30048	48VDC 300AH	15.4							