




DS95
Multistage Centrifugal
Borehole Pumps

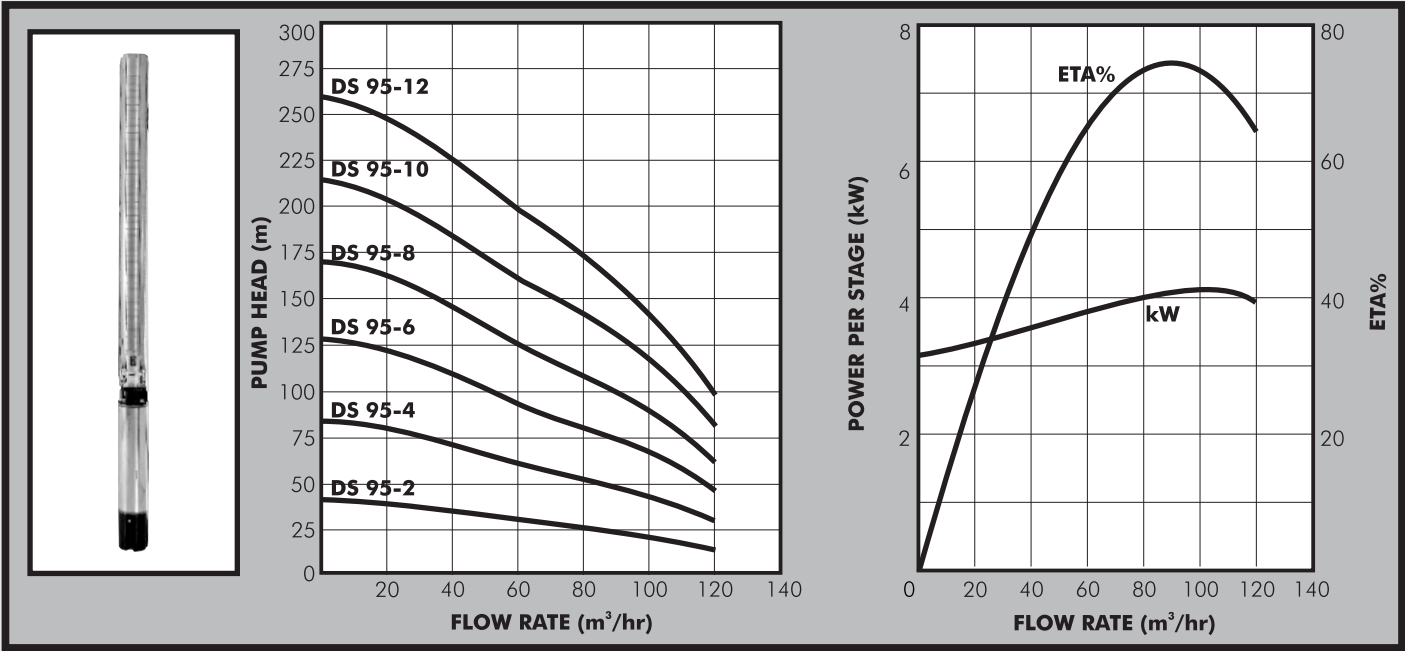

PUMP

DAYLIFF DS submersible pumps are designed specifically for borehole supply applications. They are of multistage centrifugal impeller design and all parts are made from premium AISI304 stainless steel with water lubricated rubber bearings. A submersible motor is fitted beneath the pump and suction is effected through a strainer between the pump and motor.

MOTOR

The pump is coupled to a sealed liquid cooled 2-pole asynchronous squirrel cage motor constructed from stainless steel. The motor requires a remote starter and if unstable supply voltage is likely, an additional quick tripping control relay is recommended. Note that due to low starting torques of submersible motors, it is recommended that DOL starters are used. A DAYLIFF SCT electronic pump controller is recommended for comprehensive pump control including low level motor overload and irregular power supply protection.

Enclosure Class : IP68 **Insulation Class:** F **Voltage:** 3x415V **Speed:** 2900rpm

OPERATING CONDITIONS

Pumped Liquid: Thin, clean chemically non-aggressive liquids without solid particles or fibres.

Max. Liquid Temperature: DS wet end-50°C

Max. Water Depth: 300m

Min. Borehole Diameter: 200mm - 6" motor
254mm - 8" motor

PUMP DATA

Model	Motor Size (")	Motor		Full Load Current (A)	I start I	Dimensions (mm)				Weight (Kg)
		kW	HP			A	B	C	E*	
DS 95-2	6	9.2	13	21.5	4.2	1631	867	746	178	84
DS 95-4		18.5	25	40	5.5	2060	1057	1003		115
DS 95-6		26	35	57	4.9	2416	1157	1259		177
DS 95-8		37	50	78.5	5.7	2827	1312	1515		206
DS 95-10	8	45	60	96.5	6.0	3053	1270	1783	200	234
DS 95-12		55	75	114	5.9	3389	1350	2039		258

E*=Maximum diameter of the pump inclusive of cable guard and motor

