




PEDROLLO



VILLABELLA

Swimming Pool Pumps

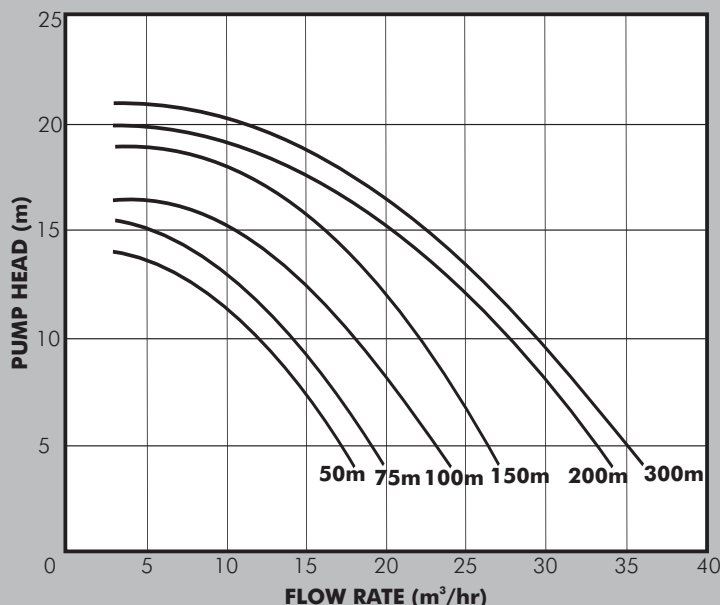

PUMP

Pedrollo VILLABELLA are self-priming swimming pool pumps specially designed for residential and institutional pool applications. Features Include an extra-large pre-filter is provided to reduce cleaning frequency fitted with a transparent cover for easy visual inspection, high-quality components, a quick-release threaded lid with key for simple opening and heavy duty materials for extended durability and quiet operation. All pump components are high resistance to heat, chemicals and salt corrosion. The motor case is painted with cathaphoresis for added protection.

Pumps are supplied complete with connection unions.

MOTOR

The pump is coupled to an IE3 rated high-efficiency induction motor rated for continuous operation with integral thermal motor protection overload that can be connected directly to mains power supply through a 15 amp fuse or MCB.

Enclosure Class : IP55

Insulation Class: F

Voltage: 1x240V

Speed: 2900rpm

OPERATING CONDITIONS

Pumped Liquid: Thin, Clean, Chemically non-aggressive liquids without solids or fibres

Max. Liquid Temperature: +40°C.

Maximum Ambient Temperature: 40°C.

Maximum Suction Lift: 4m

Maximum Working Pressure: 2.5bar

PUMP DATA

Model	Motor		Current (A)	Dimensions (mm)		Weight (kg)
	kW	HP		Inlet/Outlet(″)	B	
VILLABELLA 50m	0.37	0.5	4.2	2″	500	11.7
VILLABELLA 75m	0.55	0.75	4.7			11.5
VILLABELLA 100m	0.75	1	6.0			13
VILLABELLA 150m	1.1	1.5	7.5		580	14
VILLABELLA 200m	1.5	2	9.5			15
VILLABELLA 300m	2.2	3	10.5		630	17

