



# TREVITECH

MADE IN ITALY



## Pump Controllers




**Mascontrol**



**Presscontrol**



**Mondial**

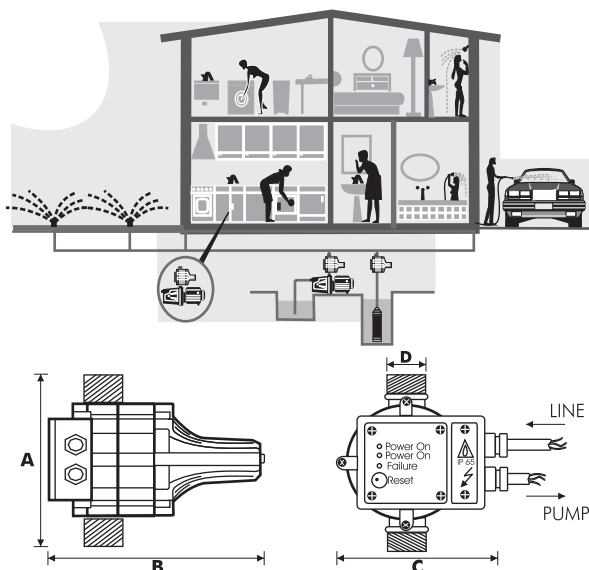

Trevitech Pump Controllers are revolutionary integrated booster pump control units for the provision of automatic pressurised water supply. They incorporate a combination of hydraulic and electronic control functions, starting the pump when system pressure drops to the pre-set value and stopping the pump when demand drops below the cut-out flow rate. Particular features are:

- Automatic pump start and stop as determined by user demand.
- Maintenance of constant output pressure.
- Pump shutdown in the event of low suction supply or suction blockage.
- Attenuates the effects of water hammer.
- Completely maintenance free; no air charging or adjustment necessary.
- LED indicator for power on, pump on and failure (except Mondial).
- Compact and simple to install.

Three models are available, the Mondial, Presscontrol and Mascontrol with their application dependent upon the pump motor size and system flow rate. For larger flow and motor size applications, the unit can be fitted on a bypass and connected to the motor starter through a contactor on the control circuit.

Trevitech Pump Controllers unique design offers many advantages over conventional expansion tank systems and also dispenses with the necessity for separate dry run protection. Their simplicity, reliability and effectiveness make them the ideal solution for the automatic control of all small pumped water supply installations.

### INSTALLATION

Presscontrol is designed to screw directly on to the delivery outlet of the pump and accommodate the full delivery flow. As cut-in pressure is fixed at 1.5 Bar (15m) the system static head must be at least 0.2 Bar (2m) below this value. It can be fitted to either dry booster pumps with positive or negative suctions and to submersible pumps.

### OPERATING DATA

Model	Motor Size		Cut in Pressure (Bar)	Pump Closed Head		Max Flow (m <sup>3</sup> /h)	Max Water Temp (°C)	Dimensions (mm)				Weight (kg)
	Power (kW)	Current (A)		Min (Bar)	Max (Bar)			A	B	C	D (BSP)	
<b>Mondial</b>	1.1	16	1.5	3.5	8	6	60	160	200	160	1"	1.0
<b>Presscontrol</b>	1.5	16	1.5	3	10	6	65	160	230	160	1"	1.3
<b>Mascontrol</b>	2.2	30	1.5	3	10	9	65	175	270	200	1 1/4"	1.7