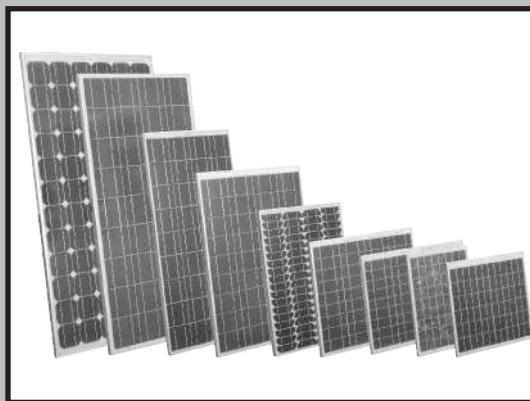
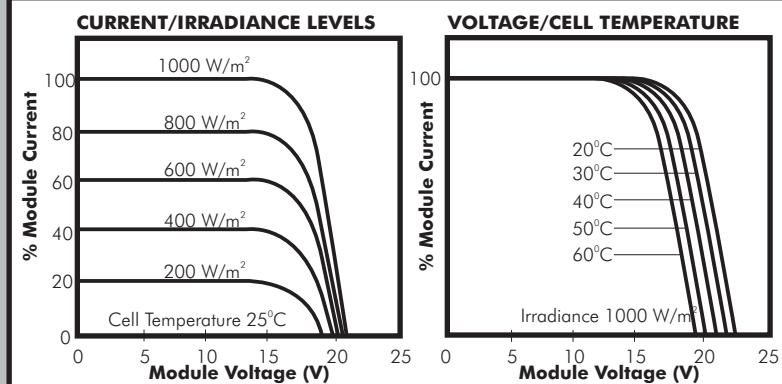


UPDATED**DAYLIFF**

Photo Voltaic Solar Modules

**TYPICAL PERFORMANCE CHARACTERISTICS (Nominal 12V Cells)**

The heart of all effective photovoltaic systems is an efficient and reliable solar module and there are none better than Dayliff PV Modules. All are sourced directly from leading global PV module manufacturers who comply with the highest standards of quality and durability and offer the following features:-


- High efficiency mono crystalline solar cells with maximum efficiency of 23.2% to provide maximum power even at low irradiation levels
- High transmission rate tempered glass with an anti-reflection coating to increase the power output and provide mechanical strength.
- Multi function water proof junction box for easy connection.
- 25 year power output warranty.
- Global Certification.

Modules are sourced from world leading PV module manufacturers principally Trina, Topray and Amerisolar who are all large scale vertically integrated manufacturers that process from silicon production to module assembly to ensure consistently high quality levels. Module types are recognised as quality products and are internationally certified by TUV Rheinland to ISO, CE and IEC standards as follows.

All Dayliff modules are manufactured to the highest standards and are guaranteed to provide reliable performance over long life spans. They are quality products in terms of both technology and performance and are ideal power sources for all types of solar applications.

THERMAL CHARACTERISTICS**Nominal Operating Cell Temperature:** 43°C ($\pm 2^\circ\text{C}$)**Temperature Coefficient Pmax.:** - 0.34%/°C**Temperature Coefficient Voc:** - 0.25%/°C**Temperature Coefficient Isc:** 0.04%/°C**Operational Temperature** -40~+85°C**PV MODULE DATA**

Model	Rated Power (W)	Nominal Voltage (V)	Peak Voltage (V)	Open Circuit Voltage (V)	Short Circuit Current (A)	Number of Cells	Dimensions (mm)						Weight (kg)
							A	B	C	D	E	F	
TP85M	85		20.9	24.4	4.45	36	875	528	715	503	25	25	5
TP125M	125		21.3	24.9	6.14		765			730	30		6
TP150M	150		37.2	43.3	4.45	64	910	750	841	80			8
TP200M	200		37.5	43.5	5.95		1190	875	1030				11
IP200M			43.2	50.8	4.81	72	1030	750	847	140			10
TP325M	325		39.1	45.4	8.75	68	1870	1510	846	180			18
AS350M	350		40.0	48.0	9.14		1956	992	1556	952	200	35	21
TR450M	450		44.6	52.9	10.74	144	1762		1100	1095	331	30	
AS550M	550		41.8	50.0	13.94		2279	1134	1279	1094	500	30	28
TR620M	620		41.4	49.6	15.91	132	2382		1400	1095	491	30	28
TR715M*	715		41.1	49.2	18.44		2384	1303			1264	492	33
													38

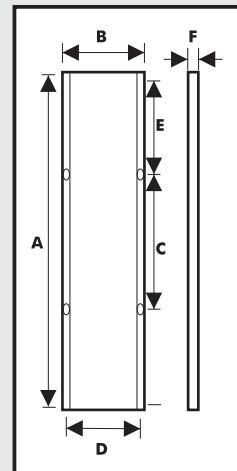

Data is given at Standard Test Conditions: Irradiance 1000W/m², spectrum AM 1.5 and 25°C cell temperature
Suffix 'M' - Monocrystalline. *Bifacial Dual Glass