




DIN64

Vertical Multistage Centrifugal Pumps

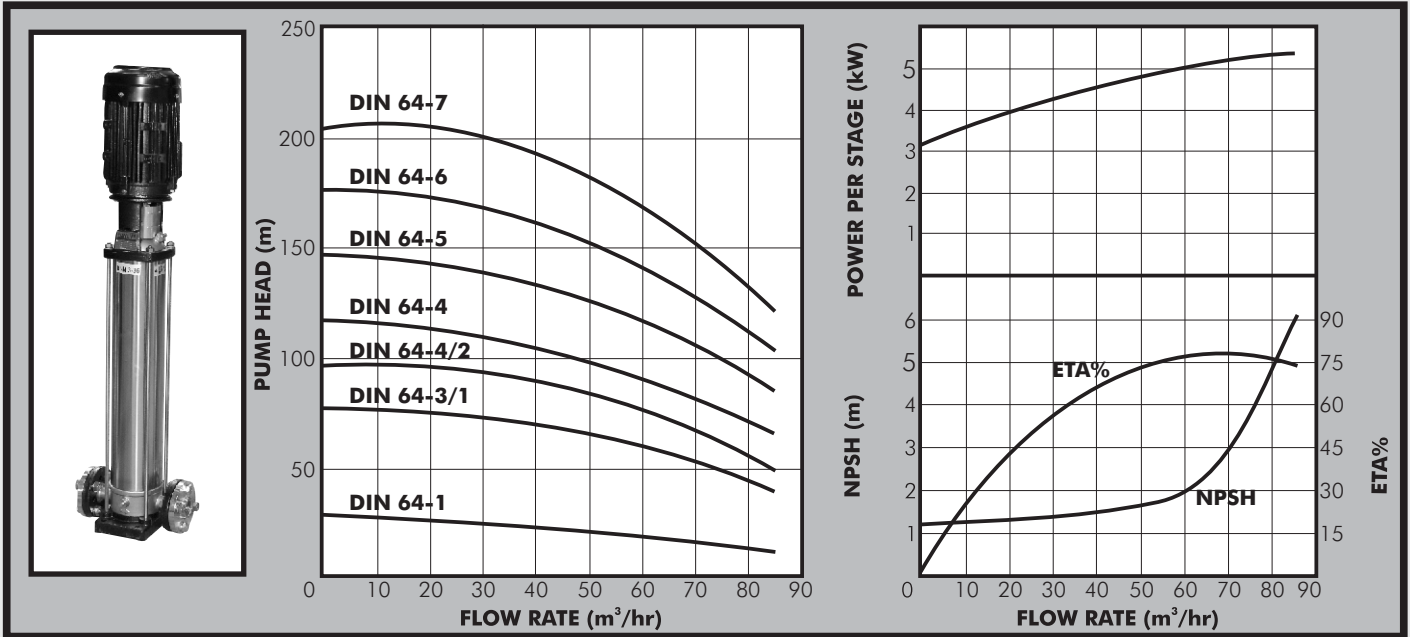

PUMP

The DAYLIFF DIN pump range are of non self priming vertical multistage in-line centrifugal design suitable for a wide range of water supply, irrigation, liquid transfer and boosting applications. The pumps are of heavy duty construction and designed for continuous duty in commercial and industrial installations. All DIN pumps feature AISI 316 stainless steel vital components in contact with water including the impellers, intermediate chambers, shaft and top and bottom housings and are suitable for pumping highly mineralised corrosive water. All pumps are water lubricated and are provided with a standard cartridge type mechanical seal. They are supplied complete with BSP internally threaded counter flanges.

MOTOR

The pumps are coupled to high efficiency IE3 totally enclosed fan cooled 2-pole motor complying with IEC standards and must be connected to an effective motor starter in accordance with local regulations.

Enclosure Class: IP55 **Insulation Class:** F **Voltage:** 3x415V **Speed:** 2900rpm

OPERATING CONDITIONS

Pumped Liquids: Thin, clean, non-aggressive and non-explosive liquids without solid particles or fibres.

Liquid Temperature Range: -15°C to +120°C

Maximum Ambient Temperature: +50°C

Maximum Suction Lift: According to the NPSH curve plus a safety margin of 1m

Maximum Operating Pressure: Up to 7.5kW - 16bar, others - 25bar

Maximum Inlet Pressure: DIN 64-1-4Bar, DIN 64-2 to 3-10Bar, DIN 64-4 to 7-15Bar

PUMP DATA

Model	Motor		Full Load Current (A)	I Start	Dimensions (mm)					Weight (kg)
	kW	HP			H1	H2	D1	D2	D3	
DIN64-1	5.5	7.5	11.2	7.0	563	925	235	197	300	101
DIN64-3-1	15	20	25.5	6.4	838	1328	269	215	350	163
DIN64-4-2	18.5	25	31.3	6.4	921	1461	318	241	350	213
DIN64-4	22	40	37.1	6.4	921	1461	318	241	350	215
DIN64-5	30	30	50.3	6.4	1003	1663	390	295	400	320
DIN64-6	37	50	61.7	6.6	1086	1746	390	295	400	342
DIN64-7	45	60	74.8	6.2	1172	1862	446	325	450	422

